

# Fitting guide

## Audi rear drinks holder

*Written by Lee Johnson (Shezlee)*



---

### *Tools required were*

- Large flat blade screwdriver
- T-35 and T-40 Security bits

---


### *Part numbers*

- V8Zo 863 476 4P K - Shelf (Drinks Holder) (Black)
- V8Zo 864 080 - Bracket
- V8Zo 864 079 A – Bracket
- V8Zo 864 455 – Adapter (2 off)
- VN 102 883 03 – Screw (2 off)

---

### *Instructions*

- 1) Check all parts. (Photo below) Note: End bracket with 2 prongs not used.

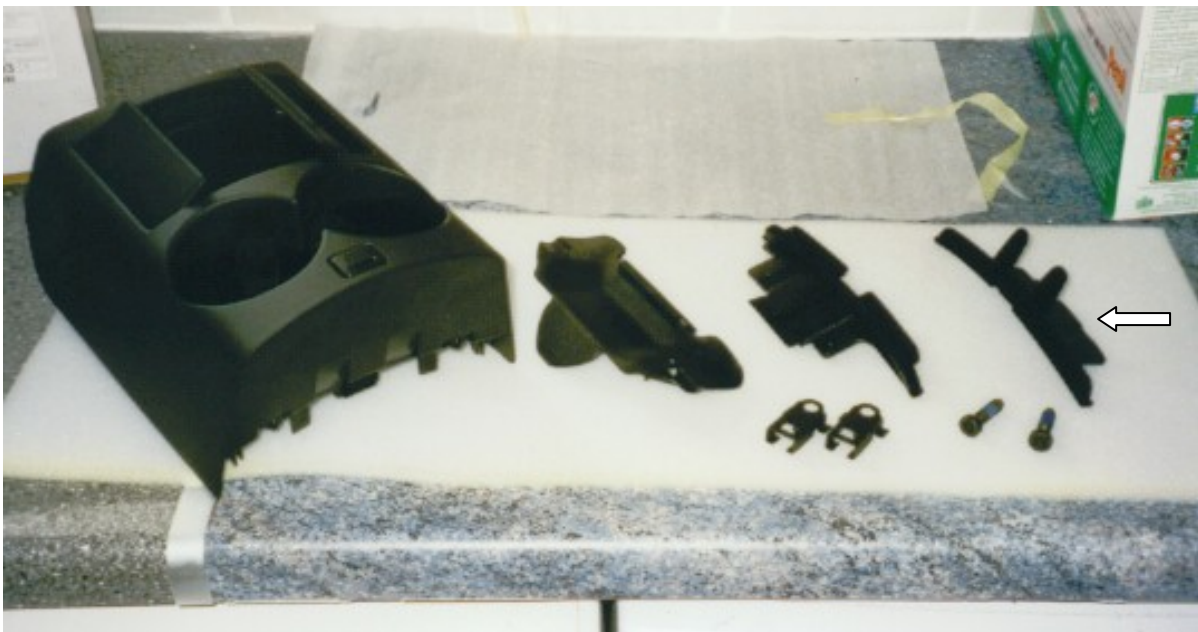

# Fitting guide

## Audi rear drinks holder

*Written by Lee Johnson (Shezlee)*




International Audi A2 Owners Club

2) Remove both rear seats (Photo below).



3) Remove plastic trim (push fit) with flat screwdriver (secured in 4 locations) (Photo below).

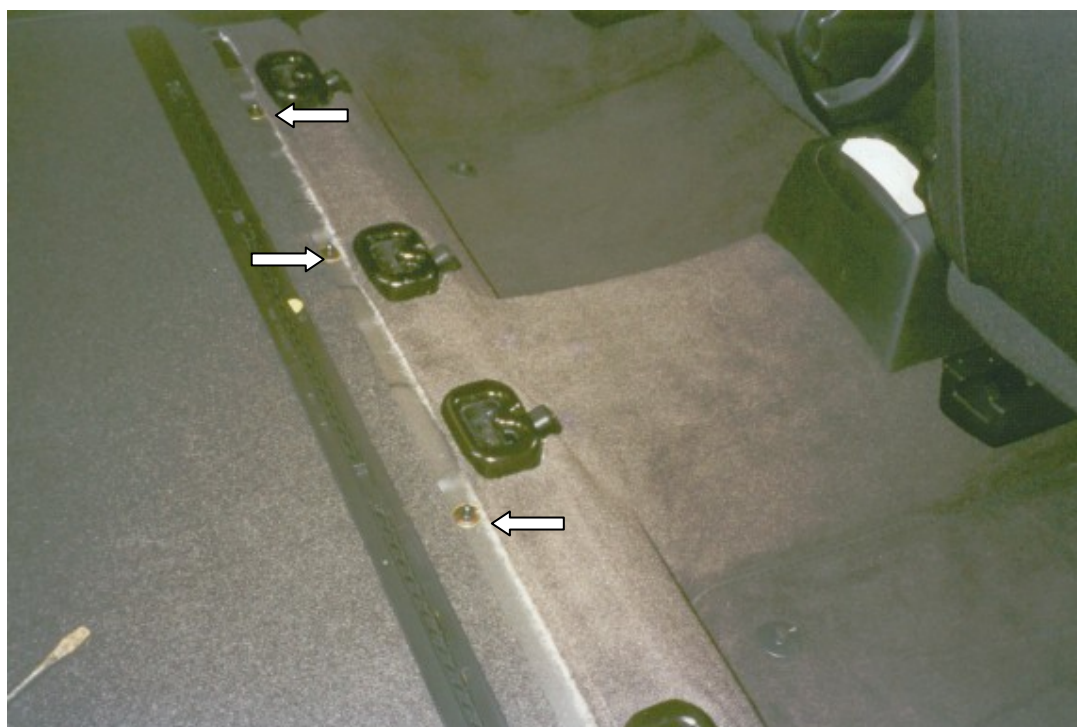

# Fitting guide

## Audi rear drinks holder

*Written by Lee Johnson (Shezlee)*



- 4) Unhook carpet from all seat fixings and remove inner bolts from the middle 2 seat fixings (Security bit T-35 straight bit) (Photo below).



- 5) Poke the new bolts through metal brackets and then the carpet making sure they are aligned with the open holes (Security bit T-40 straight bit) (Photo below).





# Fitting guide

## Audi rear drinks holder

*Written by Lee Johnson (Shezlee)*



- 6) Tighten bolts and reposition carpet around the seat fixings.
- 7) Replace the plastic trim.
- 8) Push the new plastic cover into the new metal brackets must click (Photo below).



- 9) Push the front bracket under the rear of the centre console again must click (I had 2 supplied only one would fit the drinks holder the one without the 2 prongs) (photo below).



# Fitting guide

## Audi rear drinks holder

*Written by Lee Johnson (Shezlee)*



International Audi A2 Owners Club



- 10) Place the drinks holder in the rear brackets and press the front down again until it clicks (Photo below).



- 11) Remove drinks holder by pressing the button and then lifting the front end (Photo above).
- 12) Replace the rear seats then replace the drinks holder.